


Setting up WRQ Reflection for Kerberos SSH connectivity


The Computing Division provides a customized installer for WRQ Reflection (providing you have a WRQ license) which will automatically configure Kerberos for use in the FNAL.GOV realm. It is suggested to use this installer for a simplified installation.

First, launch WRQ Reflection for UNIX and OpenVMS. Select the Connection\Connection Setup menu choice to configure a new session.

Select OPENSSSH and enter the host you wish to connect to and your login name:

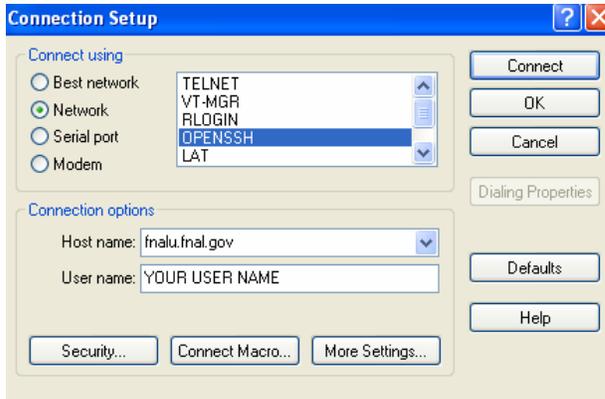

Click on the Security... tab to access more options. Force the Protocol to '2 only' (unless the host you are connecting to ONLY accepts SSH v1 connections). Uncheck both the Password and User Key boxes and select Kerberos Key Exchange instead.

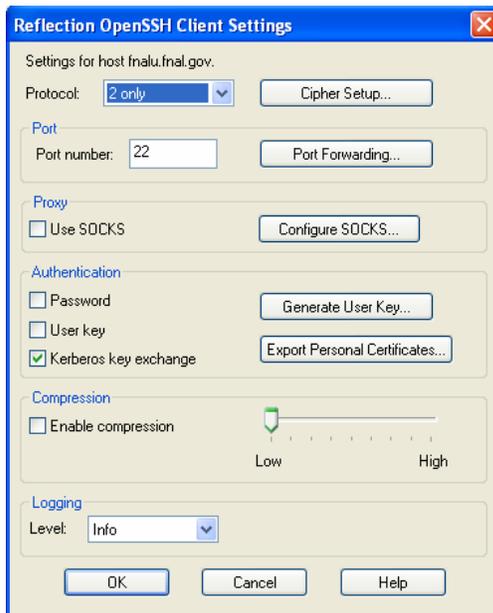

Click OK, then click the Connect button to establish your Kerberos SSH connection. You should be prompted for your Kerberos password, and if entered correctly, log into the host you specified.